


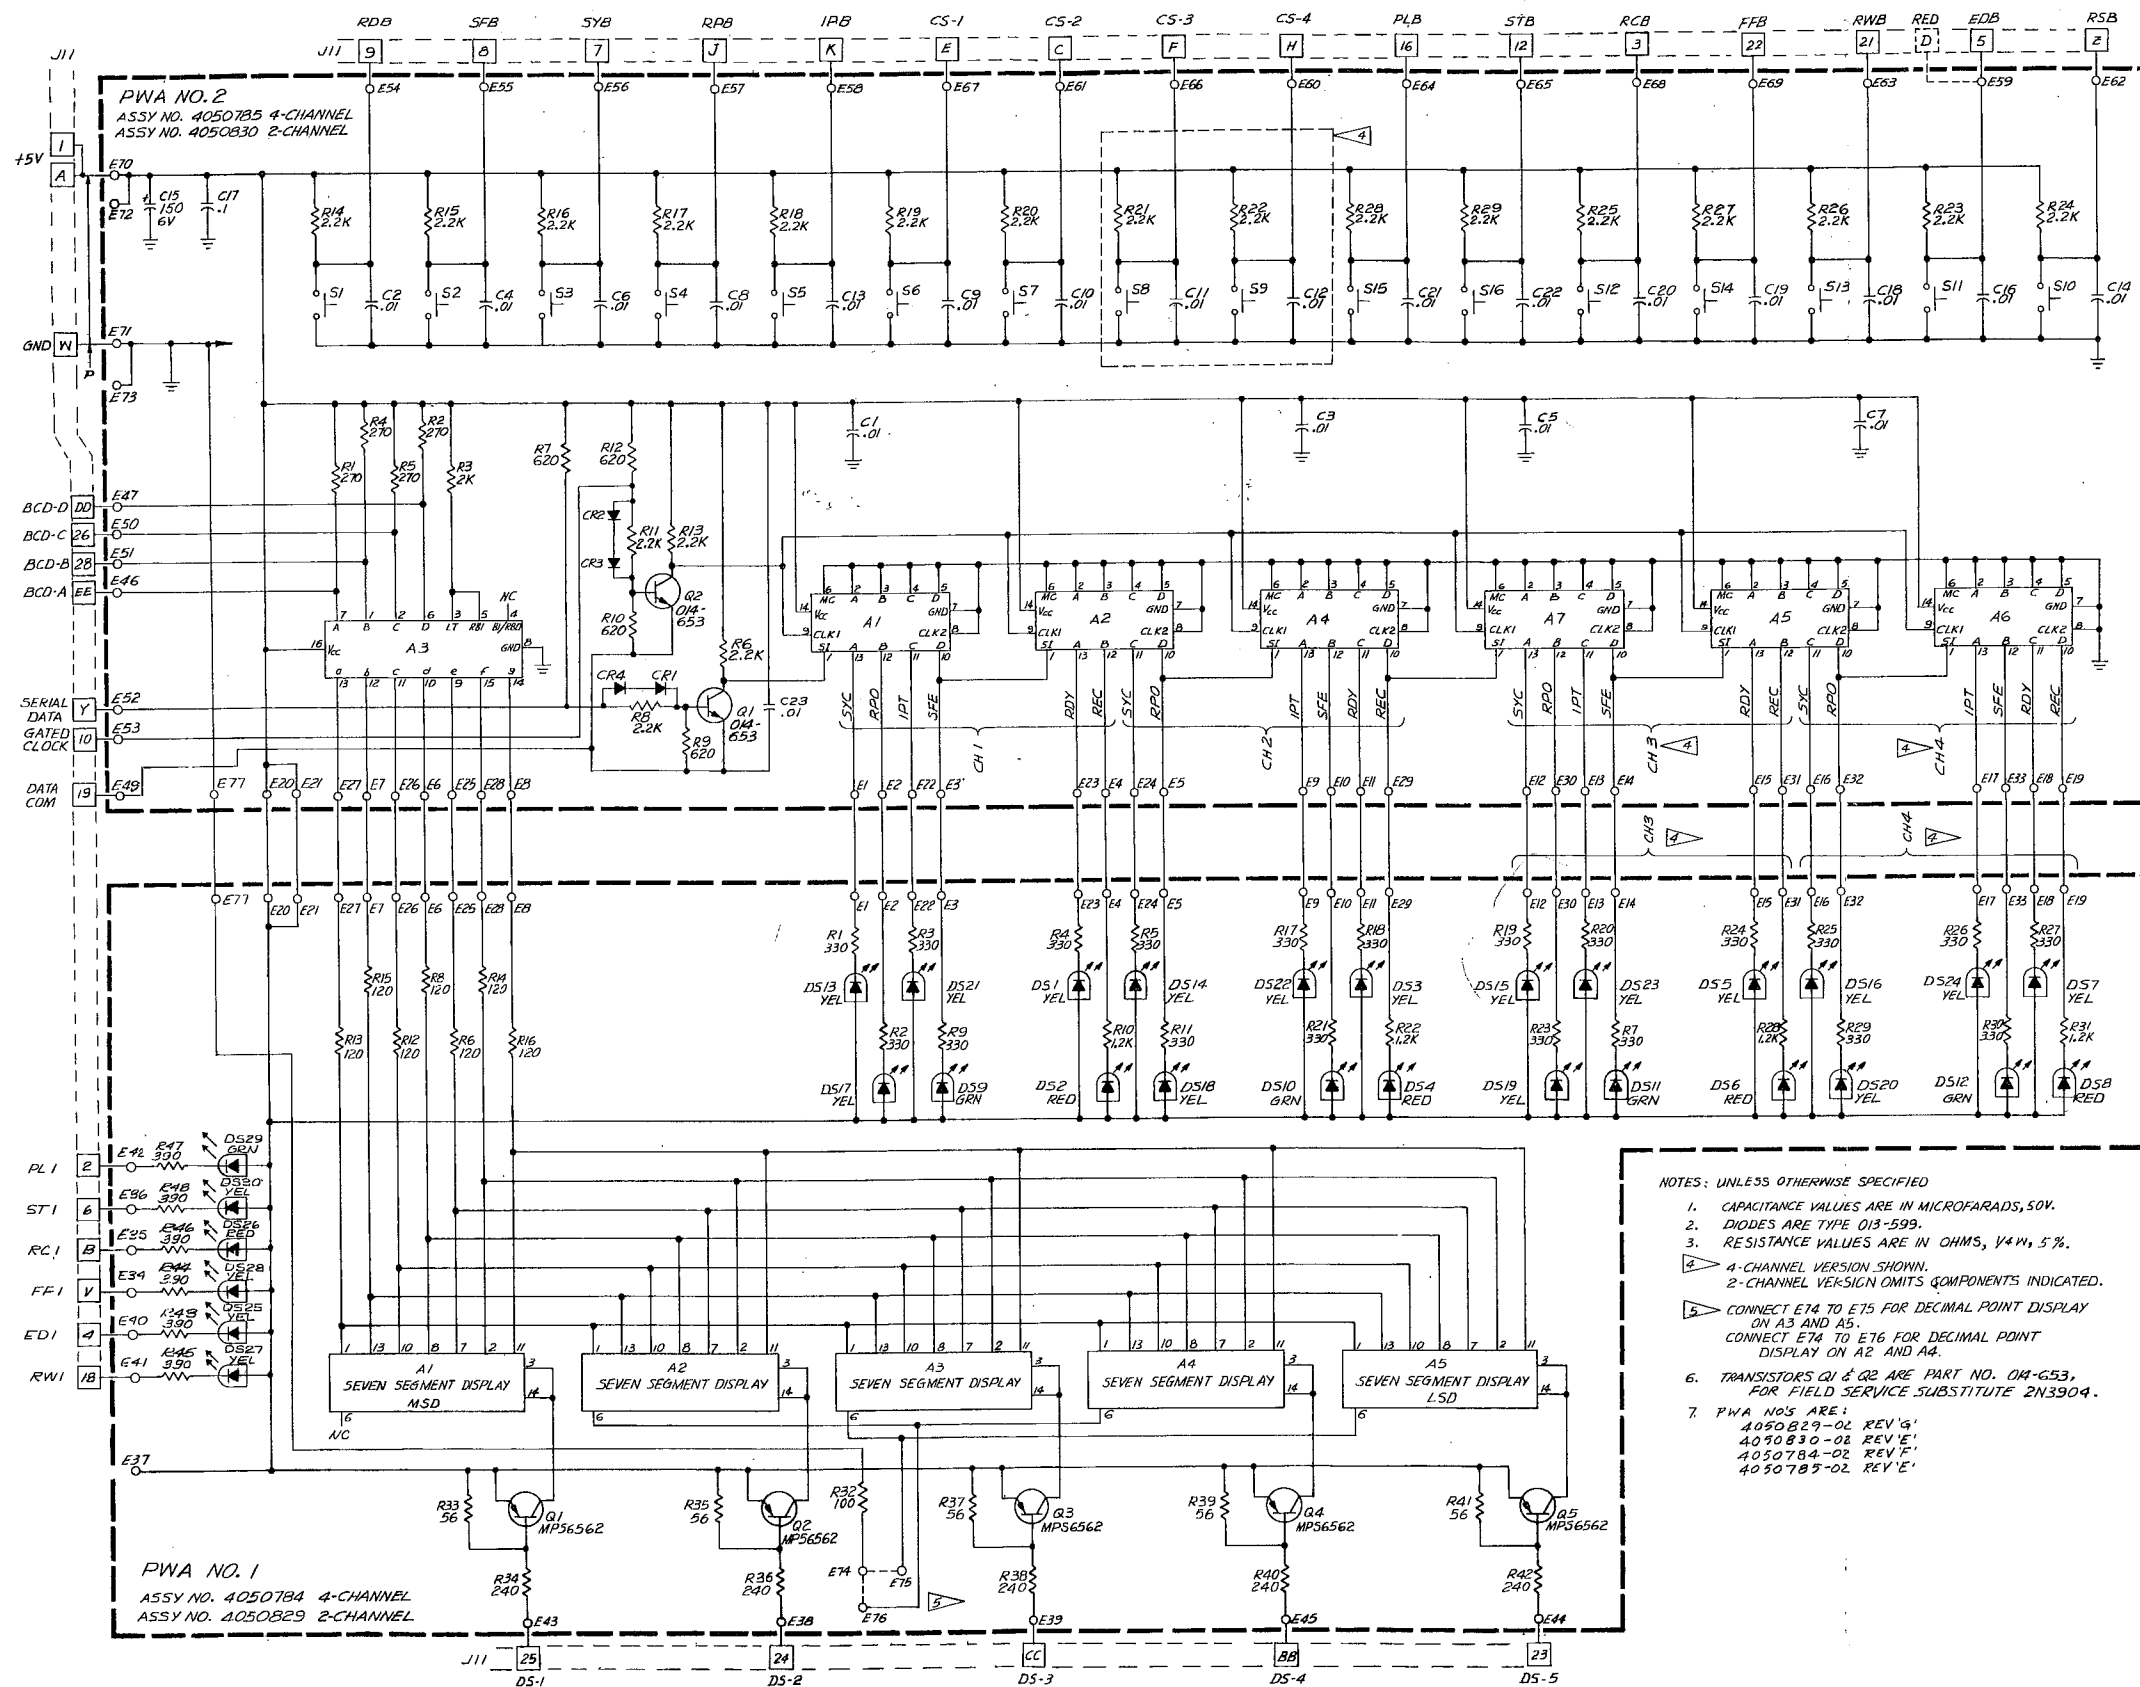

REF. DESIG.	LAST USED	NOT USED
R29		
A7		
C24		
C23		
S16		
E77	E64-E76	E74-E76

REF. DESIG.	A1	A2	A4	A3
AMPEX P/N	586-785	587-544		
VENDOR P/N	7495	7447		

REF. DESIG.	LAST USED	NOT USED
DS30		
Q5		
A6		
R48		
E77	E46-E73	

REF. DESIG.	A1-5
AMPEX P/N	581-537
VENDOR P/N	5082-7730

- NOTES: UNLESS OTHERWISE SPECIFIED
- CAPACITANCE VALUES ARE IN MICROFARADS, 50V.
 - DIODES ARE TYPE 013-599.
 - RESISTANCE VALUES ARE IN OHMS, 1/4W, 5%.
 - 4-CHANNEL VERSION SHOWN.
2-CHANNEL VERSION OMMITS COMPONENTS INDICATED.
 - CONNECT E74 TO E75 FOR DECIMAL POINT DISPLAY ON A3 AND A5.
CONNECT E74 TO E76 FOR DECIMAL POINT DISPLAY ON A2 AND A4.
 - TRANSISTORS Q1 & Q2 ARE PART NO. 0M-G53, FOR FIELD SERVICE SUBSTITUTE 2N3904.
 - PWA NOS ARE:
4050B29-02 REV 'G'
4050B30-03 REV 'E'
40507B4-02 REV 'F'
40507B5-02 REV 'E'

Schematic No. 4840396D.
Control Unit Assembly